

ASYMMETRIC SPINNAKER

FX+ FAST

design by Facnor THIMBLE

FAST ASYMMETRIC SPINNAKER THIMBLE

FX+ FAST

FX+ with FAST thimble Features :

- FAST thimble : with the FX+ furler, this FAST system allows you to use your FX+ from Gennaker to asymmetric Spinnaker in a two clicks
- Possibility to use your existing asymmetric Spinnaker
- Easy and regular furling from top to bottom.
- Free luff on asymmetric Spinnaker
- Maintenance free: high protection of the mechanisms
- STested mechanisms, strong and clever




Simple mechanisms FX+

(Smooth push spring release device)



Safe tack attachment

Stainless steel. Resistant and smooth edge for a secure latching



Carbon housing

strong and light

RATCHET SYSTEM

Removable furling line

FX+ swivel with anti-impact cover (in neoprene)



From Gennaker or Code Zero to the asymmetric Spinnaker




FAST : asymmetrical Spinnaker thimble

Rotating tack fitting with Torlon® balls
Tack attaching rope included


Smooth rotation
Torlon® balls

FAST thimble, perfectly designed to fit the FX+ drum jaws with quick release pin



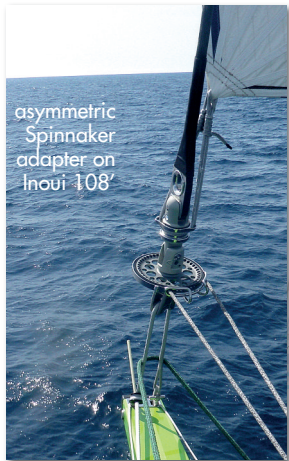


"top-down" System

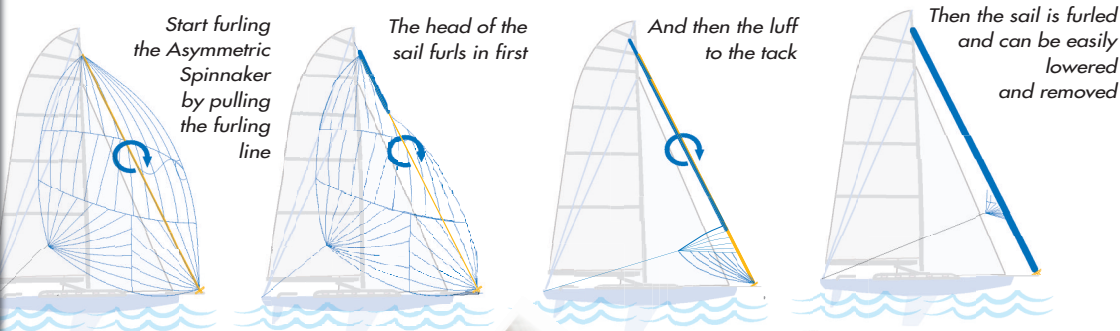

FITTING

FX+ FAST: Option fitting for asymmetric Spinnaker

- System suitable for use with an existing FX furler
- Rotating tack fitting, sail furls in from head to tack.

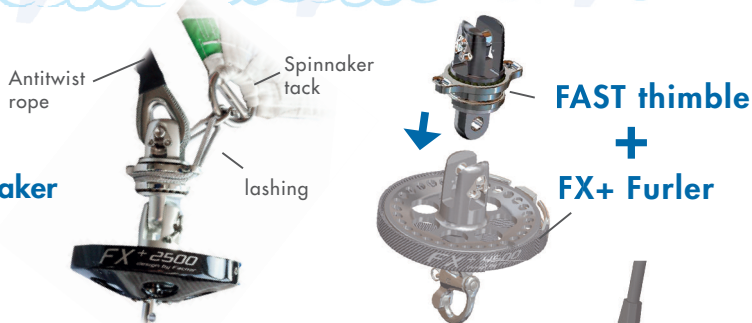


FAST asymmetric spinnaker thimbles Find the thimble adapted to your boat

FAST models	FAST 1500	FAST 2500	FAST 4500	FAST 7000	FAST 12000*
FX+ ref	1500	2500	4500	7000	12000
Boat Length (M)	10 → 12	12 → 14	13 → 16	16 → 20	contact us *Two models
(Feet)	30' → 40'	40' → 45'	42' → 55'	55' → 70'	
Max area (M ²)	80 M ²	110 M ²	200 M ²	270 M ²	
Max area (Ft ²)	861 ft ²	1184 ft ²	2153 ft ²	2906 ft ²	


360° rotating tack fitting with turlon balls

*Jaw width 22 and 26

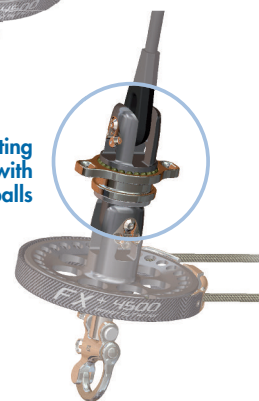

FAST asymmetric spinnaker thimbles Specifications

FAST models	FAST 1500	FAST 2500	FAST 4500	FAST 7000	FAST 12000 Standard	FAST 12000 Racing
Height (mm)	65	82	92	119	142	42
Weight (g)	222	426	581	1114	1900	1900
Jaw width (mm)	15	17,5	19	26	26	22



TACK ADJUSTMENT

Two options are available to adjust the tack of your asymmetric Spinnaker :

■ Soft converter :

- Soft converting part for snapshackle (minisolid sheaves);
- Available for FX+ 4500 and FX+ 7000




■ SSH solid sheave :

- used to adjust the tack point, with a maximum luff;
- This option is available from FX+1500 up to FX+12000, above models on request.



SSH stainless steel solid sheaves Compact and fitted with quick release pin.

SSH models	SSH1500	SSH+2500	SSH+4500	SSH+7000	SSH+12000
FX+ ref	1500	2500	4500	7000	12000
Height (mm)	49	60	69	73	84
Weight (g)	113	200	280	350	415

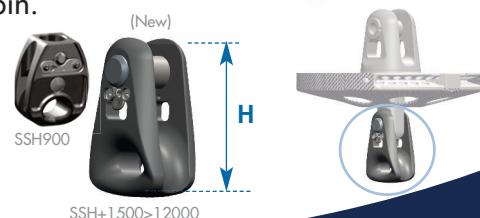

SSH+1500-12000